

# TELESCOPIC BOOM LIFT

## SPECIFICATIONS

MODELS	T14JE-2 (T45JE-2)	
Measurements	Metric	Imperial
Work Height Max.	16.3m	53'6"
Platform Height Max.	14.3m	46'11"
Horizontal Outreach	9.06m	29'9"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
<b>A</b> Stowed Length	7.94m	26'1"
Transport Length (jib tucked)	5.65m	18'6"
<b>B</b> Overall Width	2.42m	7'11"
<b>C</b> Stowed Height	2.65m	8'8"
Transport Height	3.1m	10'2"
<b>D</b> Wheelbase	2.4m	7'10"
<b>E</b> Ground Clearance	0.37m	1'3"
PRODUCTIVITY		
Platform Capacity (unrestricted)	300kg	661 lbs
Platform Capacity (restricted)	450kg	992 lbs
Max. Platform Occupancy	2(unrestricted)/3(restricted)	
Turntable Rotation	360°	360°
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.8km/h	0.5mph
Gradeability	45%	45%
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	3m	9'10"
Turning Radius-Outside	5.8m	19'
Max. Slope	5°/5°	5°/5°
Tire Type	Solid	
Tire Models	33x12-20	
Ground Pressure, Tyres	393.2 kPa	57 psi
POWER		
Power Source	80V 125Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Volume	80L	21.1gal
WEIGHT		
Machine Weight	6,700kg	14,771 lbs


## STANDARD FEATURES

- OTA remote upgrade
- Intelligent self-diagnosis function
- Auto-leveling platform
- Hydraulic rotating platform 180°
- Full proportional joystick control
- Load sensitive system
- Over-tilt protection system
- Emergency stop button
- Descent alarm
- Flashing beacons
- Horn/Hour meter
- Dual load 300kg/450kg
- Over-head anti-collision protection
- Full time active oscillating axles

## OPTIONAL

- AC power to platform
- Platform work light
- Platform anti-collision module
- Platform auxiliary guardrail
- Platform pipe rack

## MACHINE SIZE

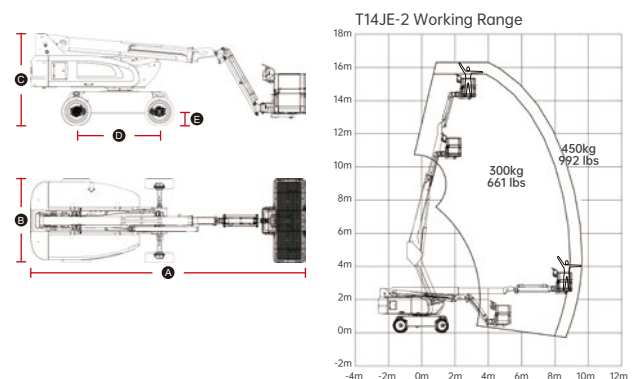

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.