
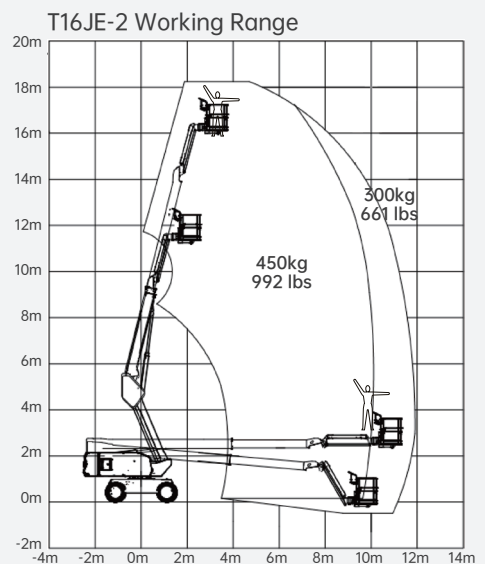
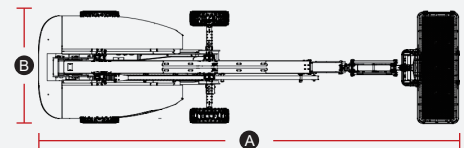


TELESCOPIC BOOM LIFT

SPECIFICATIONS

MODELS	T16JE-2	
Measurements	Metric	Imperial
Work Height Max.	18.3m	60'
Platform Height Max.	16.3m	53'6"
Horizontal Outreach	11.3m	37'1"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
A Stowed Length	9.18m	30'1"
B Overall Width	2.42m	7'11"
C Stowed Height	2.65m	8'8"
D Wheelbase	2.4m	7'10"
E Ground Clearance	0.38m	1'3"
PRODUCTIVITY		
Platform Capacity (unrestricted/restricted)	300/450kg	661/992 lbs
Turntable Rotation	360°	
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.8km/h	0.5mph
Gradeability	45%	
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	3m	9'10"
Turning Radius-Outside	5.8m	19'
Max. Working Slope	5°/5°	
Tires Type	Solid tires	
Tires Models	355/50-20	
POWER		
Power Source	80V 125Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Volume	80L	21.1gal
WEIGHT		
Machine Weight	7,600kg	16,755 lbs

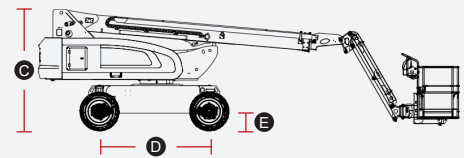

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.