

ELECTRIC RT SCISSOR LIFT

SPECIFICATIONS

MODELS	SR0818E-2	
Measurements	Metric	Imperial
Work Height Max.	9.8m	32'2"
A Platform Height - Raised	7.8m	25'7"
Platform Height - Stowed	1.45m	4'9"
B Platform Length	2.79m	9'2"
C Extension Deck	1.52m	5'
D Platform Length with Extension Deck	4.31m	14'2"
E Platform Width	1.6m	5'3"
F Overall Length	3.76m	12'4"
G Overall Width	1.79m	5'10"
H Overall Height - Rails up	2.55m	8'4"
Overall Height - Rails down	1.89m	6'2"
I Wheelbase	2.3m	7'7"
Ground Clearance	0.24m	9"

PRODUCTIVITY

Max. Platform Occupancy (in/out)	4 / 4	
Platform Capacity	680kg	1,499 lbs
Platform Capacity - Extension	140kg	309 lbs
Drive Height	Full Height	
Gradeability - Stowed	35%	
Min. Turning Radius	2.46m	8'1"
Raise/Lower Speed	35 / 30s	
Drive Mode	Four-wheel drive	
Tire Type	Foam-filled tire	
Tire Size	663x283mm	26"x11"

POWER


Power Source	72V 120Ah
--------------	-----------

HYDRAULIC SYSTEM

Hydraulic Oil Volume	50L	13.2gal
----------------------	-----	---------

WEIGHT

Machine Weight	4,190kg	9,237 lbs
----------------	---------	-----------

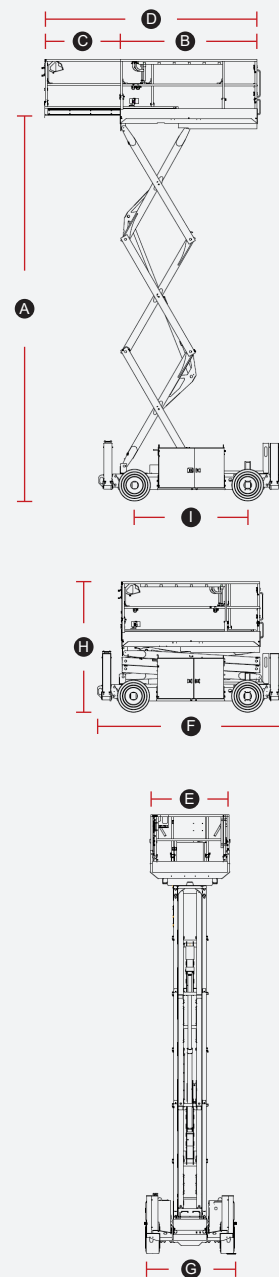

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.