


SCISSOR LIFTS

SPECIFICATIONS

MODELS	S0607-2 (S1932-2)	
Measurements	Metric	Imperial
Work Height Max.	7.8m	25'7"
A Platform Height-Raised	5.8m	19'
B Platform Length	1.64m	5'5"
C Extension Deck	0.9m	2'11"
D Platform Length With Extension Deck	2.54m	8'4"
E Platform Width	0.73m	2'5"
F Overall Length	1.837m	6'
G Overall Width	0.79m	2'7"
H Overall Height-Guardrails Up	2m	6'7"
I Overall Height-Guardrails Down	1.666m	5'6"
J Wheelbase	1.35m	4'5"
Ground Clearance(Stowed/Raised)	55/16mm	2.2" / 0.6"
PRODUCTIVITY		
Max. Platform Occupants (in/out)	2 (in) / 1(out)	
Platform Capacity	230kg	507 lbs
Platform Capacity-Extension Deck	120kg	265 lbs
Drive Height	Full Height	
Gradeability-Stowed	25%	
Min. Turning Radius	1.95m	6'5"
Raise/Lower Speed	16s / 22s	
Brakes	Front-wheel Brake	
Drive Mode	4x2	
Tire Type	Solid Non-marking	
Tire Size	323x100mm	13"x4"
Ground Pressure, Tyres	941kPa	136.5psi
POWER		
Lead-acid Battery	24V(2x12V),130Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Capacity	8.5L	2.3gal
WEIGHT		
Machine Weight	1,550kg	3,417 lbs

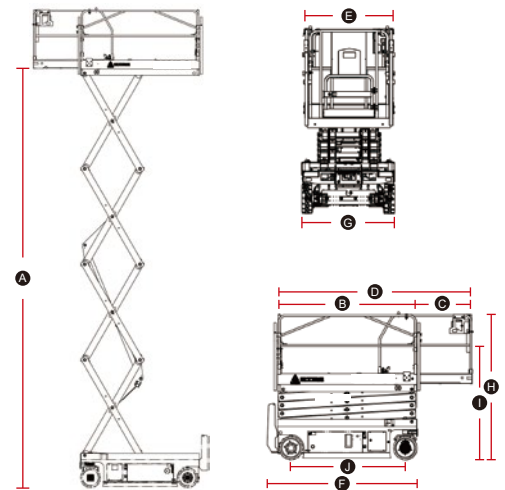

STANDARD FEATURES

- Proportional controls
- Foldable guardrail
- Emergency descent
- Emergency stop button
- Tubing explosion-proof system
- Intelligent diagnostic system
- Flashing beacons
- Automatic braking system
- Over-tilt protection system
- Charging protection system
- Safety arm for troubleshooting
- Horn/Hour meter
- Standard transport forklift Holes
- Pothole guard
- Telematics
- Swing-out component tray
- Alarm
- Manual brake release

OPTIONS

- AC power to platform
- Anti-collision protection
- Overload sensing system

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.