

TELESCOPIC BOOM LIFT

SPECIFICATIONS

MODELS	T22JE-2 (T72JE-2)	
	Metric	Imperial
Measurements		
Work Height Max.	24.2m	79'5"
Platform Height Max.	22.2m	72'10"
Horizontal Outreach	15.47m	50'9"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
A Stowed Length	9.86m	32'4"
Transport Length (jib tucked)	7.56m	24'10"
B Overall Width	2.5m	8'2"
C Stowed Height	2.76m	9'1"
Transport Height	3m	9'10"
D Wheelbase	2.51m	8'3"
E Ground Clearance	0.4m	1'4"

PRODUCTIVITY		
Platform Capacity (unrestricted)	300kg	661 lbs
Platform Capacity (restricted)	450kg	992 lbs
Max. Platform Occupancy	2(unrestricted)/3(restricted)	
Turntable Rotation	360°	360°
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.8km/h	0.5mph
Gradeability	45%	45%
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	3.5m	11'6"
Turning Radius-Outside	6.35m	20'10"
Max. Slope	5°/5°	5°/5°
Tire Type	Solid Non-marking	
Tire Models	36x14-20	
Ground Pressure, Tyres	618.8 kPa	89.8 psi

POWER		
Power Source	80V 228Ah	


HYDRAULIC SYSTEM		
Hydraulic Oil Volume	90L	23.8gal

WEIGHT		
Machine Weight	10,800kg	23,810 lbs

STANDARD FEATURES
OTA remote upgrade
Intelligent self-diagnosis function
Auto-leveling platform
Hydraulic rotating platform 180°
Full proportional joystick control
Load sensitive system
Over-tilt protection system
Emergency stop button
Descent alarm
Flashing beacons
Horn/Hour meter
Dual load 300kg/450kg
Over-head anti-collision protection
Full time active oscillating axles

OPTIONAL
AC power to platform
Platform work light
Platform auxiliary guardrail
Half-height mesh platform
Platform storage rack

MACHINE SIZE

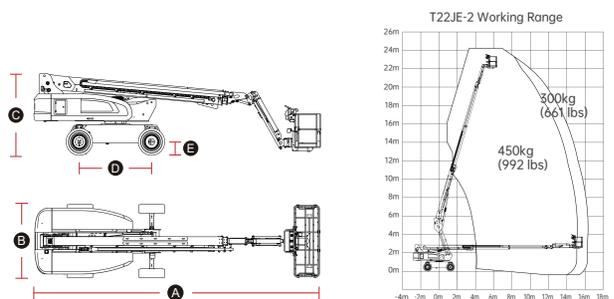

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.