
LGMG SRIGZBE

ELECTRIC RT SCISSOR LIFT



- Battery powered, zero emission and quiet drive mean this machine is environmentally friendly.
- Integrated with four-wheel-drive system with axles that offers strong power and smooth transmission.
- Hydraulic outriggers deliver a better solution on uneven ground.
- Intelligent self-diagnostic system for quick troubleshooting.

LGMG ELECTRIC RT SCISSOR LIFT


SPECIFICATIONS

| MODELS | SR1623E |
|------------------------------|------------|
| Measurements | Metric |
| Work Height Max. | 17.9m |
| Platform Height - Raised | 15.9m |
| Platform Length | 3.98/4.81m |
| Platform Width | 1.83m |
| Overall Length (with ladder) | 4.9m |
| Overall Width | 2.3m |
| Overall Height - Rails up | 3.23m |
| Overall Height - Rails down | 2.53m |
| 6 Extension Deck | 1.45/1.14m |
| Wheelbase | 2.85m |
| Ground Clearance-Center | 0.26m |
| PRODUCTIVITY | |

| Ground Clearance-Center | 0.26m |
|--|-------------------|
| PRODUCTIVITY | |
| Max. Platform Occupancy | 4(in) / 4(out) |
| Platform Capacity | 680kg |
| Platform Capacity - Extension | 230kg |
| Drive Height | 8.5m |
| Gradeability - Stowed | 40% |
| Min. Turning Radius | 6.57m |
| Raise/Lower Speed | 70s / 50s |
| Brakes | Four-wheel Brake |
| Drive Mode | 4x4 |
| Tires Type | Solid Non-marking |
| Tires Size | 835x290mm |
| POWER | |
| Power Source | 80V DC 228Ah |
| HYDRAULIC SYSTEM | |
| Hydraulic Oil Volume | 80L |
| WEIGHT | |
| Machine Weight with Outriggers (CE/ANSI) | 8200kg |

| STANDARD FEATURES | |
|------------------------------------|-------------------------------|
| Li-battery | Tilt alarm with lift cut-out |
| Proportional control | Overload sensing system |
| Foldable guardrail | Self-lock entry gate |
| Emergency stop device | All motions alarm |
| Manual brake release | Intelligent diagnostic system |
| Emergency descent | Auto-leveling outriggers |
| Oscillating axle | Solid non-marking tires |
| Descent alarm with flashing beacon | |

| OPTIONAL | |
|---|-------------------------------|
| Telematics | Solid tires |
| AC power to platform | Foam-filled non-marking tires |
| Biodegradable hydraulic oil Foam-filled tires | |

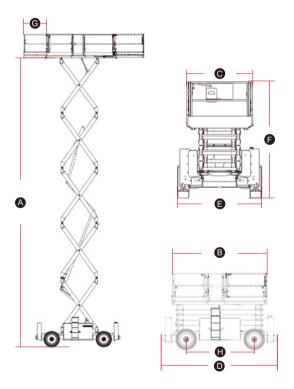

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China Email: sales@lgmg.com.cn Tel: +86 531 6787 9283

LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands Email: sales@lgmgeurope.com Tel: +31 850 642 777

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States Email: sales@lgmgna.com Tel: +1 833 288 5464



