

TELESCOPIC BOOM LIFT

SPECIFICATIONS

MODELS	T38JE-2 (T125JE-2)	
Measurements	Metric	Imperial
Work Height Max.	40.2m	131'11"
Platform Height Max.	38.2m	125'4"
Horizontal Outreach	22.3m	73'2"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
A Stowed Length	14.31m	46'11"
Transport Length (jib tucked)	11.96m	39'3"
B Overall Width (axles retracted)	2.44m	8'
C Overall Width (axles extended)	4.04m	13'3"
D Stowed Height	2.74m	9'
Transport Height	3.15m	10'4"
E Wheelbase (axles retracted)	4.16m	13'8"
F Ground Clearance	0.34m	1'1"
PRODUCTIVITY		
Platform Capacity (unrestricted)	300kg	661 lbs
Platform Capacity (restricted)	450kg	992 lbs
Max. Platform Occupancy	2(unrestricted)/3(restricted)	
Turntable Rotation	360°	360°
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.6km/h	0.37mph
Gradeability	45%	45%
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside (axles retracted)	6.6m	21'8"
Turning Radius-Outside (axles retracted)	9m	29'6"
Turning Radius-Inside (axles extended)	2.6m	8'6"
Turning Radius-Outside (axles extended)	6.2m	20'4"
Max. Slope	5°/5°	5°/5°
Tire Type	Foam-filled Non-marking	
Tire Models	445/50D 710	
Ground Pressure, Tyres	1075.3 kPa	156psi
POWER		
Lithium Battery	80V 560Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Volume	180L	47.6gal
WEIGHT		
Machine Weight	19,100kg	42,108 lbs


STANDARD FEATURES

OTA remote upgrade
Intelligent self-diagnosis function
Auto-leveling platform
Hydraulic rotating platform 180°
Full proportional joystick control
Load sensitive system
Over-tilt protection system
Emergency stop button
Descent alarm
Flashing beacons
Horn/Hour meter
Dual load 300kg/450kg
Over-head anti-collision protection
Full time active oscillating axles

OPTIONAL

AC power to platform
Platform work light
Platform auxiliary guardrail
Half-height mesh platform
Platform storage rack

MACHINE SIZE / WORKING RANGE

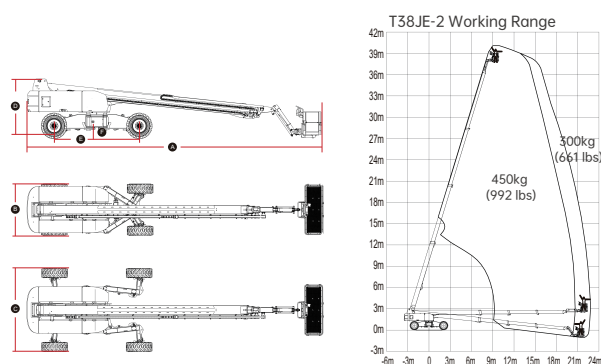

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.