



# SCISSOR LIFT RANGE

## SPECIFICATIONS

MODELS	S0808E-2	
Measurements	Metric	Imperial
Work Height Max.	9.8/8m (in/out)	32'2"/26'3" (in/out)
<b>A</b> Platform Height-Raised	7.8/6m (in/out)	25'7"/19'8" (in/out)
<b>B</b> Platform Length	2.26m	7'5"
<b>C</b> Extension Deck	0.9m	2'11"
<b>D</b> Platform Length With Extension Deck	3.16m	10'4"
<b>E</b> Platform Width	0.79m	2'7"
<b>F</b> Overall Length	2.44m	8'
<b>G</b> Overall Width	0.83m	2'9"
<b>H</b> Overall Height-Guardrails Up	2.32m	7'7"
<b>I</b> Overall Height-Guardrails Down	1.95m	6'5"
<b>J</b> Wheelbase	1.86m	6'1"
Ground Clearance(Stowed/Raised)	100/20mm	4" / 0.8"
PRODUCTIVITY		
Max. Platform Occupants (in/out)	2 (in) / 1(out)	
Platform Capacity	230kg	507 lbs
Platform Capacity-Extension Deck	120kg	265 lbs
Drive Height	Full Height	
Gradeability-Stowed	25%	
Min. Turning Radius	2.2m	7'3"
Raise/Lower Speed	31s / 40s	
Brakes	Front-wheel Brake	
Drive Mode	4x2	
Tire Type	Solid Non-marking	
Tire Size	380x130mm	15"x5"
POWER		
Lead-acid Battery	24V(2x12V),130Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Capacity	11L	2.9gal
WEIGHT		
Machine Weight	2,160kg	4,762 lbs

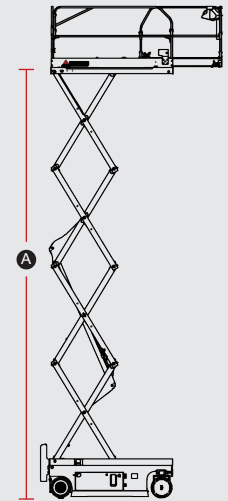

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.