


# SCISSOR LIFT RANGE

## SPECIFICATIONS

MODELS	S1212E-2	
Measurements	Metric	Imperial
Work Height Max.	14/9.5m (in/out)	45'11"/31'2" (in/out)
<b>A</b> Platform Height-Raised	12/7.5m (in/out)	39'4"/24'7" (in/out)
<b>B</b> Platform Length	2.26m	7'5"
<b>C</b> Extension Deck	0.9m	2'11"
<b>D</b> Platform Length With Extension Deck	3.16m	10'4"
<b>E</b> Platform Width	1.12m	3'8"
<b>F</b> Overall Length	2.43m	8'
<b>G</b> Overall Width	1.19m	3'11"
<b>H</b> Overall Height-Guardrails Up	2.65m	8'8"
<b>I</b> Overall Height-Guardrails Down	1.84m	6'
<b>J</b> Wheelbase	1.85m	6'1"
Ground Clearance(Stowed/Raised)	100/20mm	4"/ 0.8"
PRODUCTIVITY		
Max. Platform Occupants (in/out)	2 (in) / 1(out)	
Platform Capacity	320kg	705 lbs
Platform Capacity-Extension Deck	120kg	265 lbs
Drive Height	Full Height	
Gradeability-Stowed	25%	
Min. Turning Radius	2.7m	8'10"
Raise/Lower Speed	65s / 60s	
Brakes	Front-wheel Brake	
Drive Mode	4x2	
Tire Type	Solid Non-marking	
Tire Size	380x130mm	15"x5"
POWER		
Lead-acid Battery	24V(4×6V),190Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Capacity	21L	5.5gal
WEIGHT		
Machine Weight	2,940kg	6,482 lbs

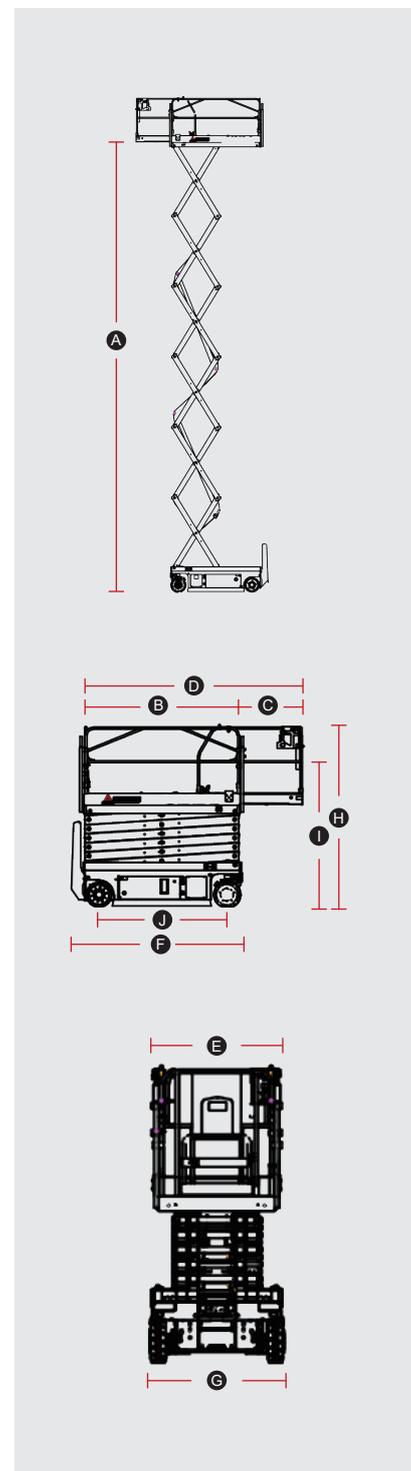

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.