

# TELESCOPIC BOOM LIFT

## SPECIFICATIONS

MODELS	T20J-2 (T65J-2)	
Measurements	Metric	Imperial
Work Height Max.	22m	72'2"
Platform Height Max.	20m	65'7"
Horizontal Outreach	13.62m	44'8"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
Ⓐ Stowed Length	10.69m	35'1"
Transport Length (jib tucked)	8.38m	27'6"
Ⓑ Overall Width	2.5m	8'2"
Ⓒ Stowed Height	2.68m	8'10"
Transport Height	3m	9'10"
Ⓓ Wheelbase	2.51m	8'3"
Ⓔ Ground Clearance	0.4m	1'4"
PRODUCTIVITY		
Platform Capacity (unrestricted)	300kg	661 lbs
Platform Capacity (restricted)	450kg	992 lbs
Max. Platform Occupancy	2(unrestricted)/3(restricted)	
Turntable Rotation	360°	360°
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.8km/h	0.5mph
Gradeability	45%	45%
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	3.5m	11'6"
Turning Radius-Outside	6.35m	20'10"
Max. Slope	5°/5°	5°/5°
Tire Type	Solid	
Tire Models	36×14-20	
Ground Pressure, Tyres	541.8 kPa	78.6 psi
POWER		
Power Source	Kubota 25kW/33.5hp	
Power Source	100L	26.4gal
HYDRAULIC SYSTEM		
Hydraulic Oil Volume	120L	31.7gal
WEIGHT		
Machine Weight	9,650kg	21,275 lbs


## STANDARD FEATURES

- OTA remote upgrade
- Intelligent self-diagnosis function
- Auto-leveling platform
- Hydraulic rotating platform 180°
- Full proportional joystick control
- Load sensitive system
- Over-tilt protection system
- Emergency stop button
- Descent alarm
- Flashing beacons
- Horn/Hour meter
- Dual load 300kg/450kg
- Over-head anti-collision protection
- Full time active oscillating axles

## OPTIONAL

- AC power to platform
- Platform work light
- Platform auxiliary guardrail
- Half-height mesh platform
- Platform storage rack

## MACHINE SIZE

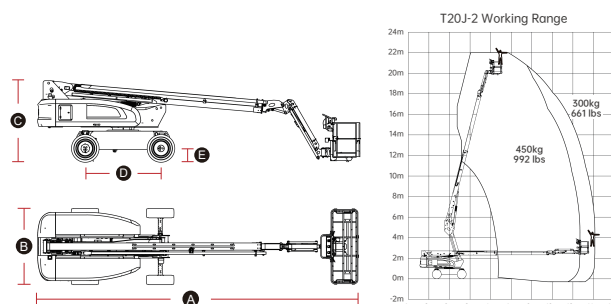

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.