

TELESCOPIC BOOM LIFT

SPECIFICATIONS

MODELS	T20JE-2 (T65JE-2)	
Measurements	Metric	Imperial
Work Height Max.	22m	72'2"
Platform Height Max.	20m	65'7"
Horizontal Outreach	13.62m	44'8"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
A Stowed Length	10.69m	35'1"
Transport Length (jib tucked)	8.38m	27'6"
B Overall Width	2.5m	8'2"
C Stowed Height	2.68m	8'10"
Transport Height	3m	9'10"
D Wheelbase	2.51m	8'3"
E Ground Clearance	0.4m	1'4"

PRODUCTIVITY

Platform Capacity (unrestricted)	300kg	661 lbs
Platform Capacity (restricted)	450kg	992 lbs
Max. Platform Occupancy	2(unrestricted)/3(restricted)	
Turntable Rotation	360°	360°
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.8km/h	0.5mph
Gradeability	45%	45%
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	3.5m	11'6"
Turning Radius-Outside	6.35m	20'10"
Max. Slope	5°/5°	5°/5°
Tire Type	Solid Non-marking	
Tire Models	36x14-20	
Ground Pressure, Tyres	541.8 kPa	78.6 psi

POWER

Power Source	80V 228Ah	
--------------	-----------	--

HYDRAULIC SYSTEM

Hydraulic Oil Volume	90L	23.8gal
----------------------	-----	---------

WEIGHT

Machine Weight	9,400kg	20,723 lbs
----------------	---------	------------


STANDARD FEATURES

OTA remote upgrade
Intelligent self-diagnosis function
Auto-leveling platform
Hydraulic rotating platform 180°
Full proportional joystick control
Load sensitive system
Over-tilt protection system
Emergency stop button
Descent alarm
Flashing beacons
Horn/Hour meter
Dual load 300kg/450kg
Over-head anti-collision protection
Full time active oscillating axles

OPTIONAL

AC power to platform
Platform work light
Platform auxiliary guardrail
Half-height mesh platform
Platform storage rack

MACHINE SIZE

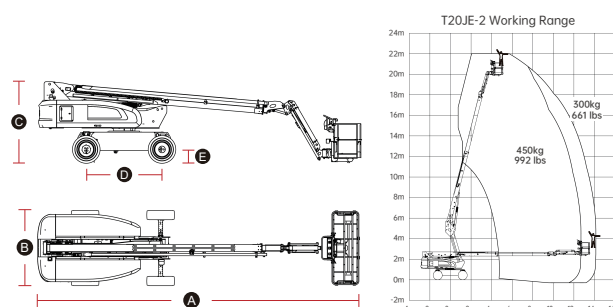

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.