

TELESCOPIC BOOM LIFT

SPECIFICATIONS


MODELS	T28JE-2	
Measurements	Metric	Imperial
Work Height Max.	30.2m	99'1"
Platform Height Max.	28.2m	92'6"
Horizontal Outreach	21.42m	70'3"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
A Stowed Length	12.63m	41'5"
Length-Transport (jib tucked)	10.36m	34'
B Overall Width	2.5m	8'2"
C Stowed Height	2.83m	9'3"
Height-Transport	3.13m	10'2"
D Wheelbase	2.85m	9'4"
E Ground Clearance	0.4m	1'4"

PRODUCTIVITY		
Platform Capacity (unrestricted/restricted)	300/450kg	661/992 lbs
Max. Platform Occupancy	3	
Turntable Rotation	360°	
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.8km/h	0.5mph
Gradeability	45%	
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	4m	13'1"
Turning Radius-Outside	7.15m	23'5"
Max. Working Slope	5°	
Tires Type	Foam-filled Tires	
Tires Models	15-625	

POWER		
Power Source	80V 375Ah	

HYDRAULIC SYSTEM		
Hydraulic Oil Volume	115L	30.4gal

WEIGHT		
Machine Weight	16,500kg	36,376 lbs

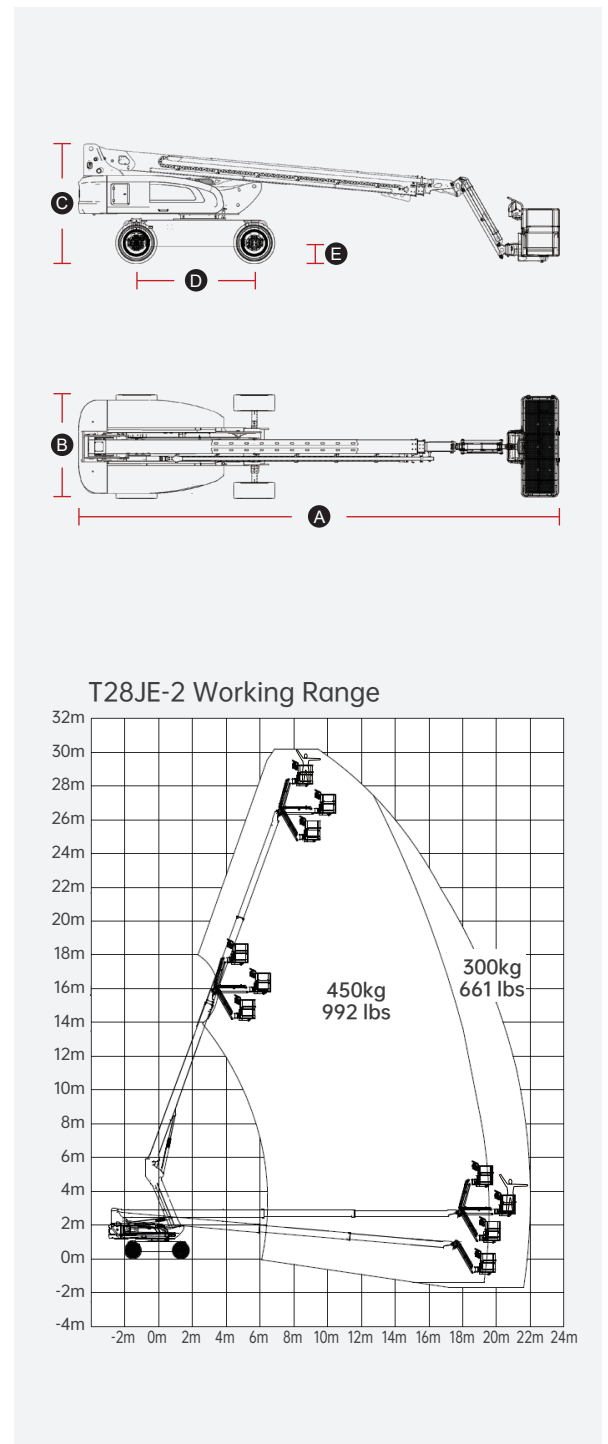

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.