

LGMG

SR1018D

DIESEL RT SCISSOR LIFT

- Larger work platform with high capacity offers great productivity.
- Powerful diesel engine, oscillating axels and four-wheel drive provide better performance on most rough terrain job sites.
- The overload system and motion alarm help the operator to complete the job in a much safer way.
- Pull-out engine tray for easy access and maintenance.
- On-board self-diagnosis system makes it easier for quick troubleshooting.



LGMG Diesel RT Scissor Lift

SPECIFICATIONS

MODELS	SR1018D (SR3369D)	
Measurements	Metric	Imperial
Work Height Max.	11.7m	38'5"
A Platform Height - Raised	9.7m	31'10"
B Platform Height - Stowed	1.41m	4'8"
C Platform Length	2.79m	9'2"
D Platform Width	1.6m	5'3"
E Overall Length (with ladder)	3.76m	12'4"
F Overall Width	1.79m	5'10"
G Overall Height - Rails up	2.55m	8'4"
Overall Height - Rails down	1.89m	6'2"
H Extension Deck	1.52m	5'
I Wheelbase	2.29m	7'6"
Ground Clearance-Center	0.23m	9"

PRODUCTIVITY

Max. Platform Occupancy (in/out)	4 / 2	
Platform Capacity	454kg	1,000 lbs
Platform Capacity - Extension	140kg	310 lbs
Drive Height	Full Height	
Gradeability - Stowed	35%	
Min. Turning Radius	4.75m	15'7"
Raise/Lower Speed	39 / 46s	
Brakes	Rear-wheel brake	
Drive Mode	4x4x2	
Tires Type	Foam-filled	
Tires Size	663x283mm	26"x11"
Ground Pressure, Tyres	524.48 kPa	76.1 psi

POWER

Power Source	Kubota 15.7kw/21.1hp	
Fuel Tank Capacity	53L	14gal

HYDRAULIC SYSTEM

Hydraulic Oil Volume	50L	13.2gal
----------------------	-----	---------

WEIGHT


Machine Weight	4,330kg	9,545 lbs
----------------	---------	-----------

STANDARD FEATURES

Proportional control	Emergency stop device
Foldable guardrail	Manual brake release
Emergency descent	Tilt alarm with lift cut-out
Oscillating axle	Overload sensing system
Self-lock entry gate	Intelligent diagnostic system
All motions alarm	Descent alarm with flashing beacon
Auto-leveling outriggers	RT Foam-filled tires
AC power to platform	

OPTIONAL

Telematics	Solid tires
Biodegradable hydraulic oil	Solid non-marking tires
Cold weather package	Foam-filled non-marking tires

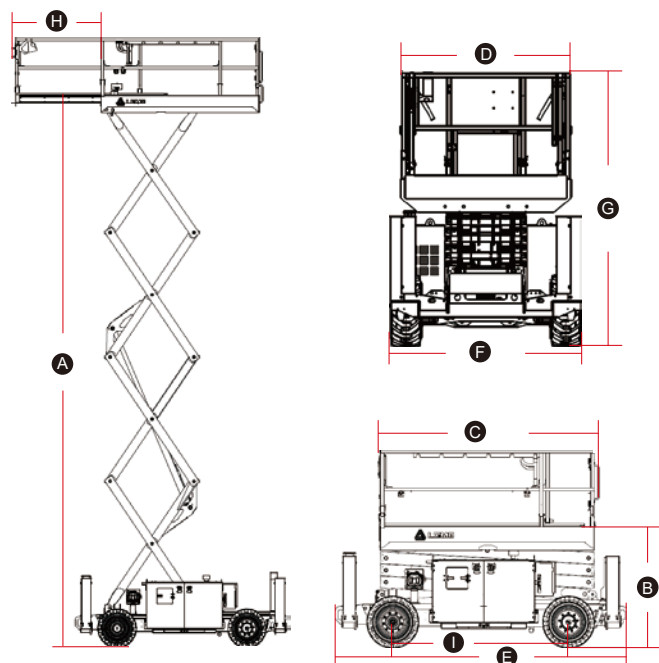

Please contact LGMG or local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purpose only.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China
Email: sales@lgmg.com.cn Tel: +86 531 6787 9283

LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands
Email: sales@lgmgeurope.com Tel: +31 850 642 777

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
Email: sales@lgmgna.com Tel: +1 833 288 5464

www.lgmglifts.com

 **LGMG**
RELIABILITY IN ACTION