


ELECTRIC RT SCISSOR LIFT

SPECIFICATIONS

MODELS	SR1418E-2	
Measurements	Metric	Imperial
Work Height Max.	15.8m	51'10"
Ⓐ Platform Height-Raised	13.8m	45'3"
Ⓑ Platform Length	2.79m	9'2"
Ⓒ Extension Deck	1.52m	5'
Ⓓ Platform Length With Extension Deck	4.31m	14'2"
Ⓔ Platform Width	1.6m	5'3"
Ⓕ Overall Length	3.76m	12'4"
Ⓖ Overall Width	1.84m	6'
Ⓗ Overall Height-Guardrails Up	2.85m	9'4"
Ⓘ Overall Height-Guardrails Down	2.12m	6'11"
Ⓛ Wheelbase	2.3m	7'7"
Ground Clearance	0.215m	8.5"
PRODUCTIVITY		
Max. Platform Occupants (in/out)	2(in) / 2(out)	
Platform Capacity	365kg	805 lbs
Platform Capacity-Extension Deck	140kg	310 lbs
Drive Height	Full Height	
Gradeability-Stowed	35%	
Min. Turning Radius	3m	9'10"
Raise/Lower Speed	80s / 60s	
Brakes	Rear-wheel Brake	
Drive Mode	4x4x2	
Tire Type	Foam-filled	
Tire Size	663x283mm	26"x11"
Ground Pressure, Tyres	635.6 kPa	92.2 psi
POWER		
Lead-acid Battery	72V 120Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Capacity	50L	13.2gal
WEIGHT		
Machine Weight	6,200kg	13,669 lbs

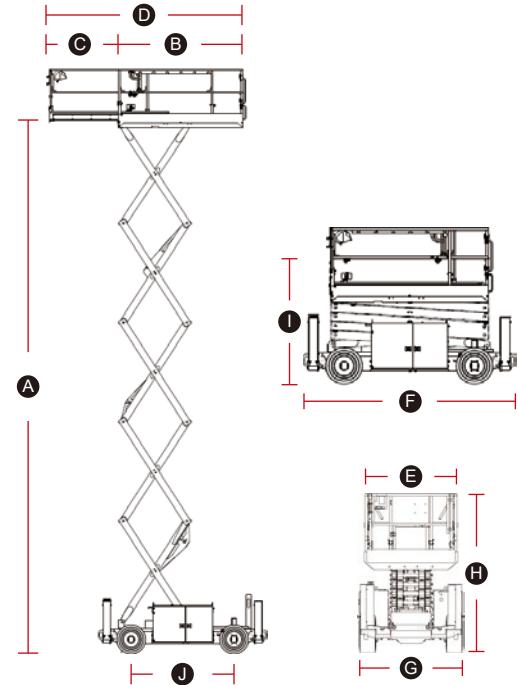

STANDARD FEATURES

- Proportional control
- Foldable guardrail
- Emergency descent
- Tubing explosion-proof system
- Intelligent diagnostic system
- Flashing beacons
- Floating function
- Automatic braking system
- Over-tilt protection system
- Safety arm for troubleshooting
- Telematics
- Alarm
- One-way platform extension deck
- Hydraulic outriggers
- AC power to platform

OPTIONS

- Foam-filled Non-marking tyres

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.