


ELECTRIC RT SCISSOR LIFT

SPECIFICATIONS

MODELS	SR1623E-2	
Measurements	Metric	Imperial
Work Height Max.	18m	59'1"
Ⓐ Platform Height-Raised	16m	52'6"
Ⓑ Platform Length	4.81m	15'9"
Ⓒ Extension Deck	1.45m/1.14m	4'9"/3'9"
Ⓓ Platform Length With Extension Deck	7.4m	24'3"
Ⓔ Platform Width	1.83m	6'
Ⓕ Overall Length	4.9m	16'1"
Ⓖ Overall Width	2.3m	7'7"
Overall Height-Guardrails Up	3.23m	10'7"
Overall Height-Guardrails Down	2.53m	8'4"
Ⓗ Wheelbase	2.85m	9'4"
Ground Clearance	255mm	10"
PRODUCTIVITY		
Max. Platform Occupants (in/out)	4 / 4	
Platform Capacity	680kg	1,500 lbs
Platform Capacity-Extension Deck	230kg	507 lbs
Drive Height	9m	29'6"
Gradeability-Stowed	40%	
Drive Speed(Stowed)	4.8km/h	3mph
Drive Speed(Raised)	1.1km/h	0.7mph
Min. Turning Radius	3.6m	11'10"
Raise/Lower Speed	60s / 55s	
Drive Mode	4x4x2	
Tire Type	Foam-filled	
Tire Size	812x305mm	32"x12"
Ground Pressure, Tyres	831 kPa	120.5 psi
POWER		
Lead-acid Battery	80V 228Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Capacity	80L	21.1gal
WEIGHT		
Machine Weight	8,100kg	17,857 lbs

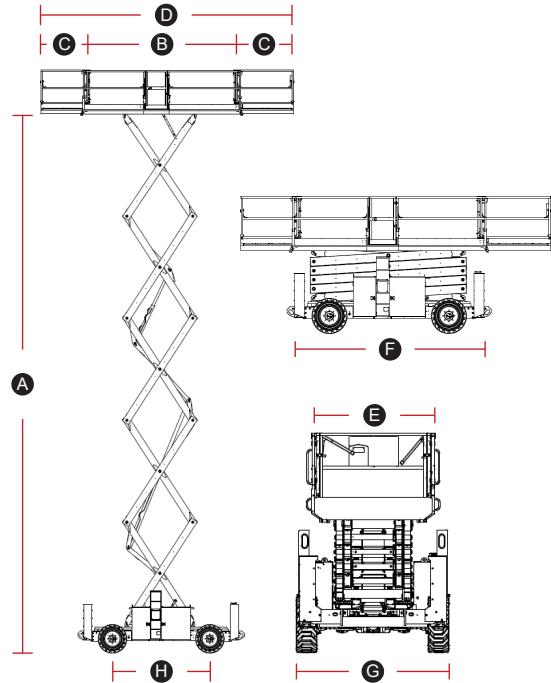

STANDARD FEATURES

- Proportional control
- Foldable guardrail
- Emergency descent
- Tubing explosion-proof system
- Intelligent diagnostic system
- Flashing beacons
- Floating function
- Automatic braking system
- Over-tilt protection system
- Safety arm for troubleshooting
- Telematics
- Alarm
- One-way platform extension deck
- Hydraulic leveling legs
- Permanent magnet synchronous motor (PMSM)

OPTIONS

- AC power to platform

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.