

# ARTICULATION BOOM LIFT

## SPECIFICATIONS

MODELS	A13JE-2 (A43JE-2)	
Measurements	Metric	Imperial
Work Height Max.	15m	49'3"
Platform Height Max.	13m	42'8"
Horizontal Outreach	7.46m	24'6"
Up and Over Height	7.1m	23'4"
Platform Length	1.2m	3'11"
Platform Width	0.9m	2'11"
<b>A</b> Stowed Length	6.698m	22'
Length-Transport (jib tucked)	5.354m	17'7"
<b>B</b> Overall Width	1.5m	4'11"
<b>C</b> Stowed Height	1.984m	6'6"
Height-Transport	2.11m	6'11"
<b>D</b> Wheelbase	2.03m	6'8"
<b>E</b> Ground Clearance	0.2m	8"

PRODUCTIVITY		
Max. Platform Occupants	2	
Platform Capacity	200kg	440 lbs
Turntable Rotation	355°	
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.4km/h	0.25mph
Gradeability	30%	
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	2.87m	9'5"
Turning Radius-Outside	4.2m	13'9"
Max. Working Slope	3°/3°	
Tires Type	Solid Non-marking	
Tires Models	600x190	
Ground Pressure, Tyres	1320kPa	191psi

POWER		
Power Source	48V 260Ah	
HYDRAULIC SYSTEM		
Hydraulic Oil Volume	25L	6.6gal
WEIGHT		
Machine Weight	6,950kg	15,322 lbs


## STANDARD FEATURES

Auto-leveling platform
Hydraulic rotating platform 160°
Full proportional joystick control
Descent alarm
Flashing beacons
Horn/Hour meter
Over-tilt protection system
Emergency stop button
Intelligent self-diagnosis function
Cylinder bellows
OTA remote upgrade
Dustproof components
Platform tool box
AC power to platform

## OPTIONAL

Platform work light
Half-height mesh platform
Solid tires

## MACHINE SIZE / WORKING RANGE

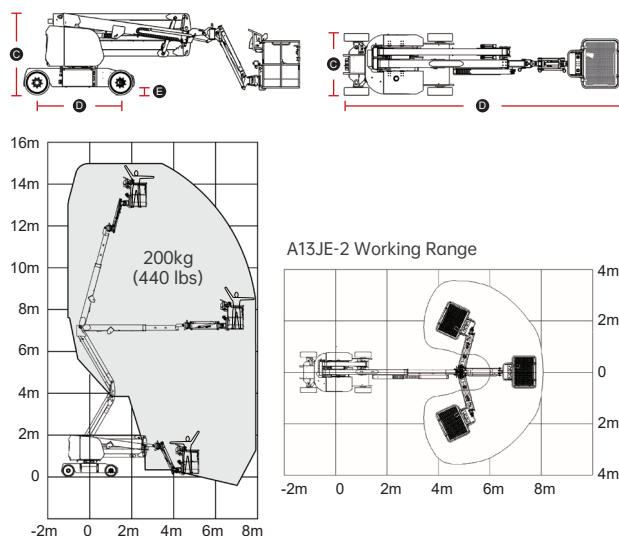

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.