

TELESCOPIC BOOM LIFT

SPECIFICATIONS

MODELS	T22J-2 (T72J-2)	
	Metric	Imperial
Measurements		
Work Height Max.	24.2m	79'5"
Platform Height Max.	22.2m	72'10"
Horizontal Outreach	15.47m	50'9"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
Ⓐ Stowed Length	9.86m	32'4"
Transport Length (jib tucked)	7.56m	24'10"
Ⓑ Overall Width	2.5m	8'2"
Ⓒ Stowed Height	2.76m	9'1"
Transport Height	3m	9'10"
Ⓓ Wheelbase	2.51m	8'3"
Ⓔ Ground Clearance	0.4m	1'4"

PRODUCTIVITY		
Platform Capacity (unrestricted)	300kg	661 lbs
Platform Capacity (restricted)	450kg	992 lbs
Max. Platform Occupancy	2(unrestricted)/3(restricted)	
Turntable Rotation	360°	360°
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.8km/h	0.5mph
Gradeability	45%	45%
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside	3.5m	11'6"
Turning Radius-Outside	6.35m	20'10"
Max. Slope	5°/5°	5°/5°
Tire Type	Solid	
Tire Models	36×14-20	
Ground Pressure, Tyres	618.8 kPa	89.8 psi

POWER		
Power Source	Kubota 25kW/33.5hp	
Power Source	100L	26.4gal


HYDRAULIC SYSTEM		
Hydraulic Oil Volume	120L	31.7gal

WEIGHT		
Machine Weight	11,060kg	24,383 lbs

STANDARD FEATURES
OTA remote upgrade
Intelligent self-diagnosis function
Auto-leveling platform
Hydraulic rotating platform 180°
Full proportional joystick control
Load sensitive system
Over-tilt protection system
Emergency stop button
Descent alarm
Flashing beacons
Horn/Hour meter
Dual load 300kg/450kg
Over-head anti-collision protection
Full time active oscillating axles

OPTIONAL
AC power to platform
Platform work light
Platform auxiliary guardrail
Half-height mesh platform
Platform storage rack

MACHINE SIZE

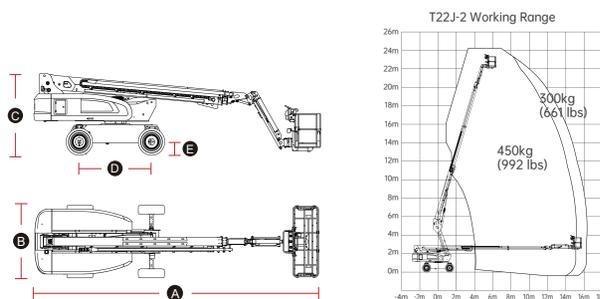

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.